


Thermally separated ceiling connector

Precast reinforced concrete balcony, cantilevered

Double-wall masonry

Detailed view above door | under window with roller shutter

DCIK 02-03-TFR | M 1 : 10

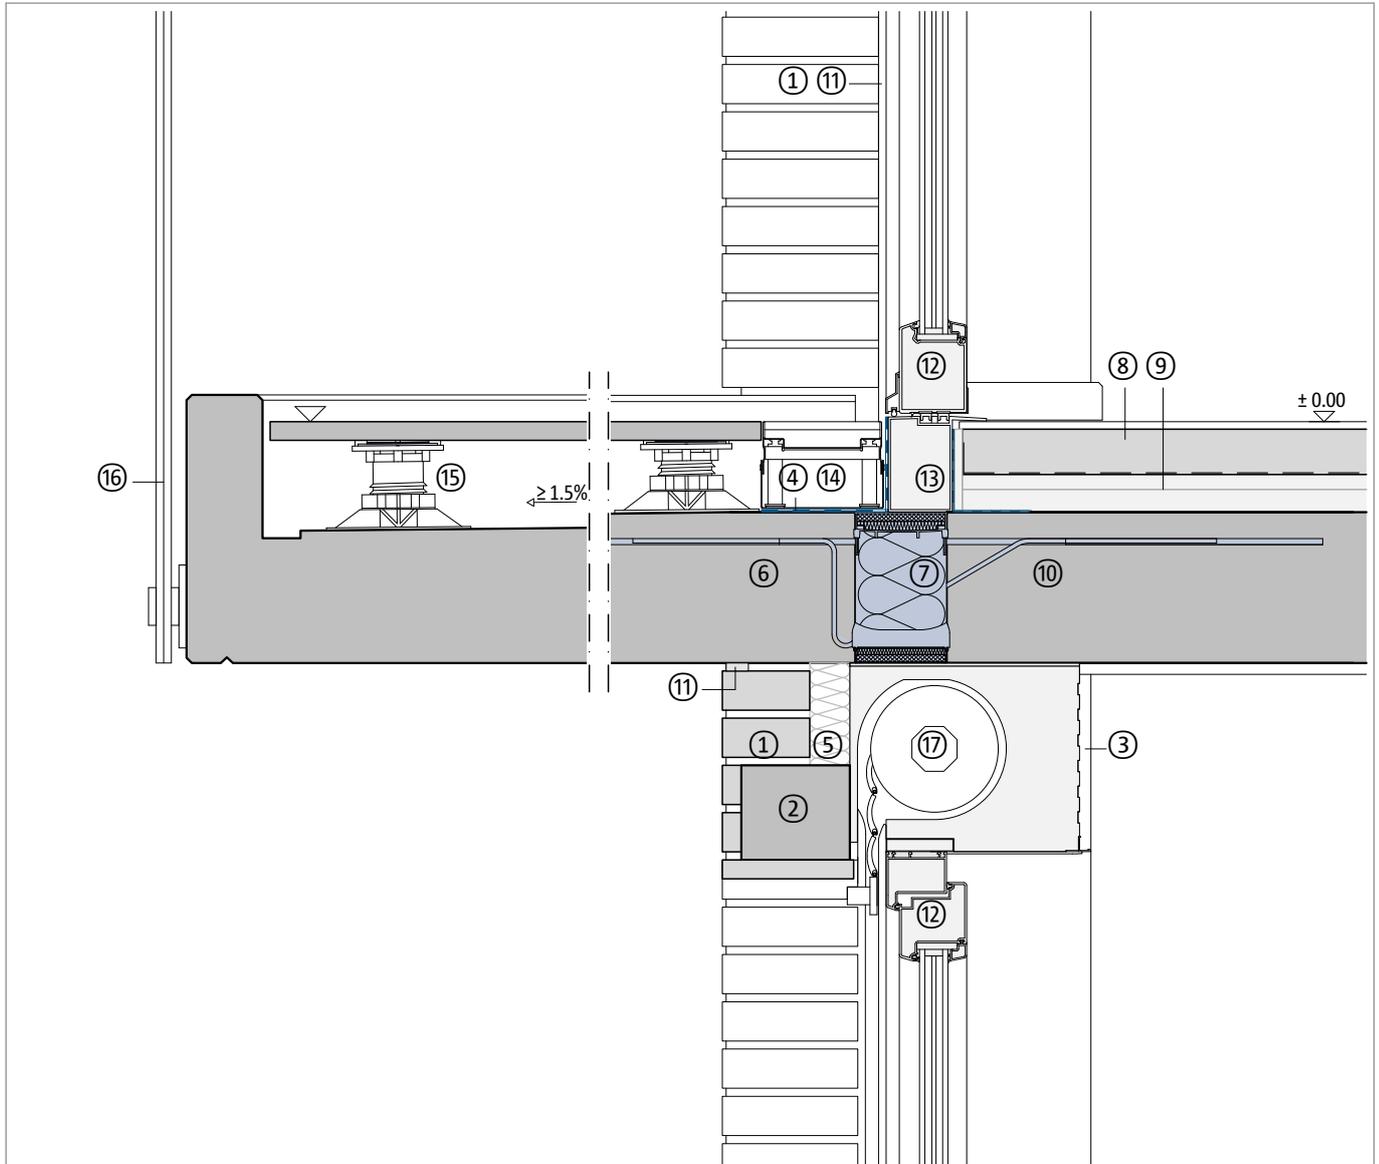

| Component, example | |
|--------------------|--------------------------------------------------|
| ① | Exposed brickwork, clinker |
| ② | Reinforced concrete lintel, concrete clinker |
| ③ | Interior plaster |
| ④ | Insulation |
| ⑤ | Thermal insulation, mineral wool |
| ⑥ | Precast reinforced concrete, waterproof concrete |
| ⑦ | Schöck Isokorb® XT type K |
| ⑧ | Floor covering, floating screed |
| ⑨ | Impact sound and thermal insulation |

| Component, example | |
|--------------------|-----------------------------------------|
| ⑩ | Reinforced concrete ceiling |
| ⑪ | Elastic joint |
| ⑫ | Window element, door element |
| ⑬ | Threshold, thermally insulated |
| ⑭ | Facade channel |
| ⑮ | Slab with support system |
| ⑯ | Railing |
| ⑰ | Roller shutter, thermally insulated box |

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.