


Thermally separated ceiling connector

Reinforced concrete slab with superstructure, cantilevered

Double-wall masonry

Detailed view above door | under window with roller shutter

DCIK 06-03-TFR | M 1 : 10

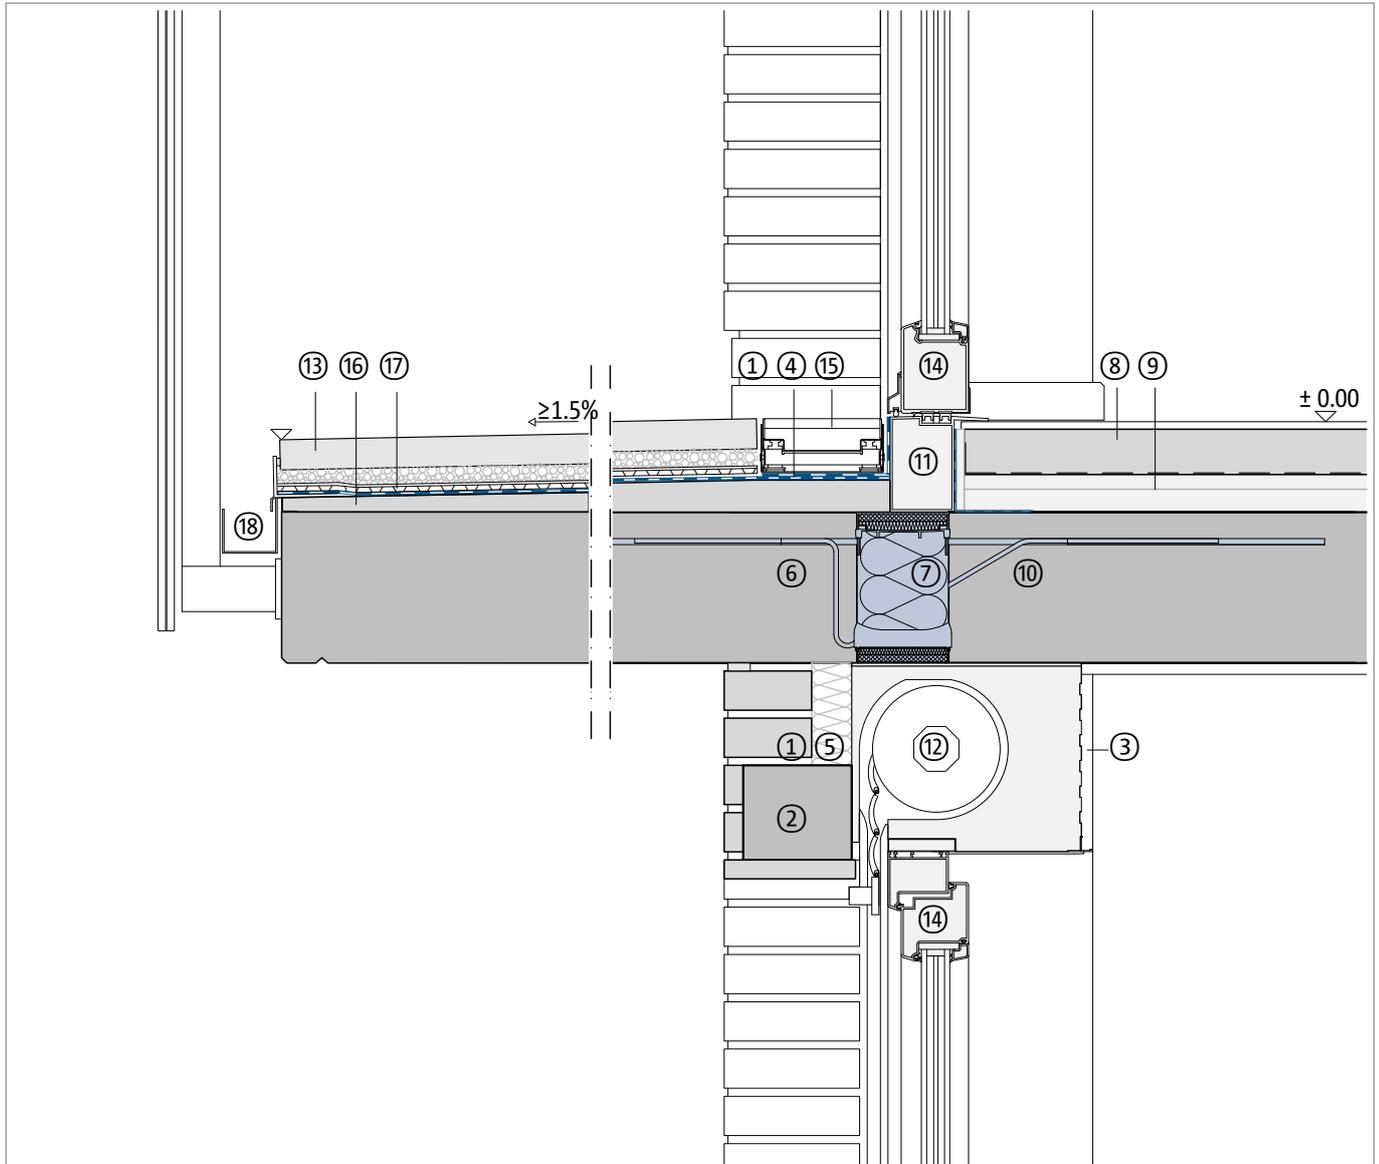

Component, example	
①	Exposed brickwork, clinker
②	Reinforced concrete lintel, concrete clinker
③	Interior plaster
④	Insulation
⑤	Thermal insulation, mineral wool
⑥	Reinforced concrete slab
⑦	Schöck Isokorb® XT type K
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Threshold, thermally insulated
⑫	Roller shutter, thermally insulated box
⑬	Slab in gravel bed
⑭	Window element, door element
⑮	Facade channel
⑯	Sloping wedge (e.g., bonded screed)
⑰	Drain mat with fleece
⑱	Edge finish: Channel, gravel trap, inlet plate

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.