


## Thermally separated ceiling connector

Reinforced concrete slab with superstructure, supported

Double-wall masonry

Detailed view above wall | below wall

DCIK 13-01-WW | M 1 : 10

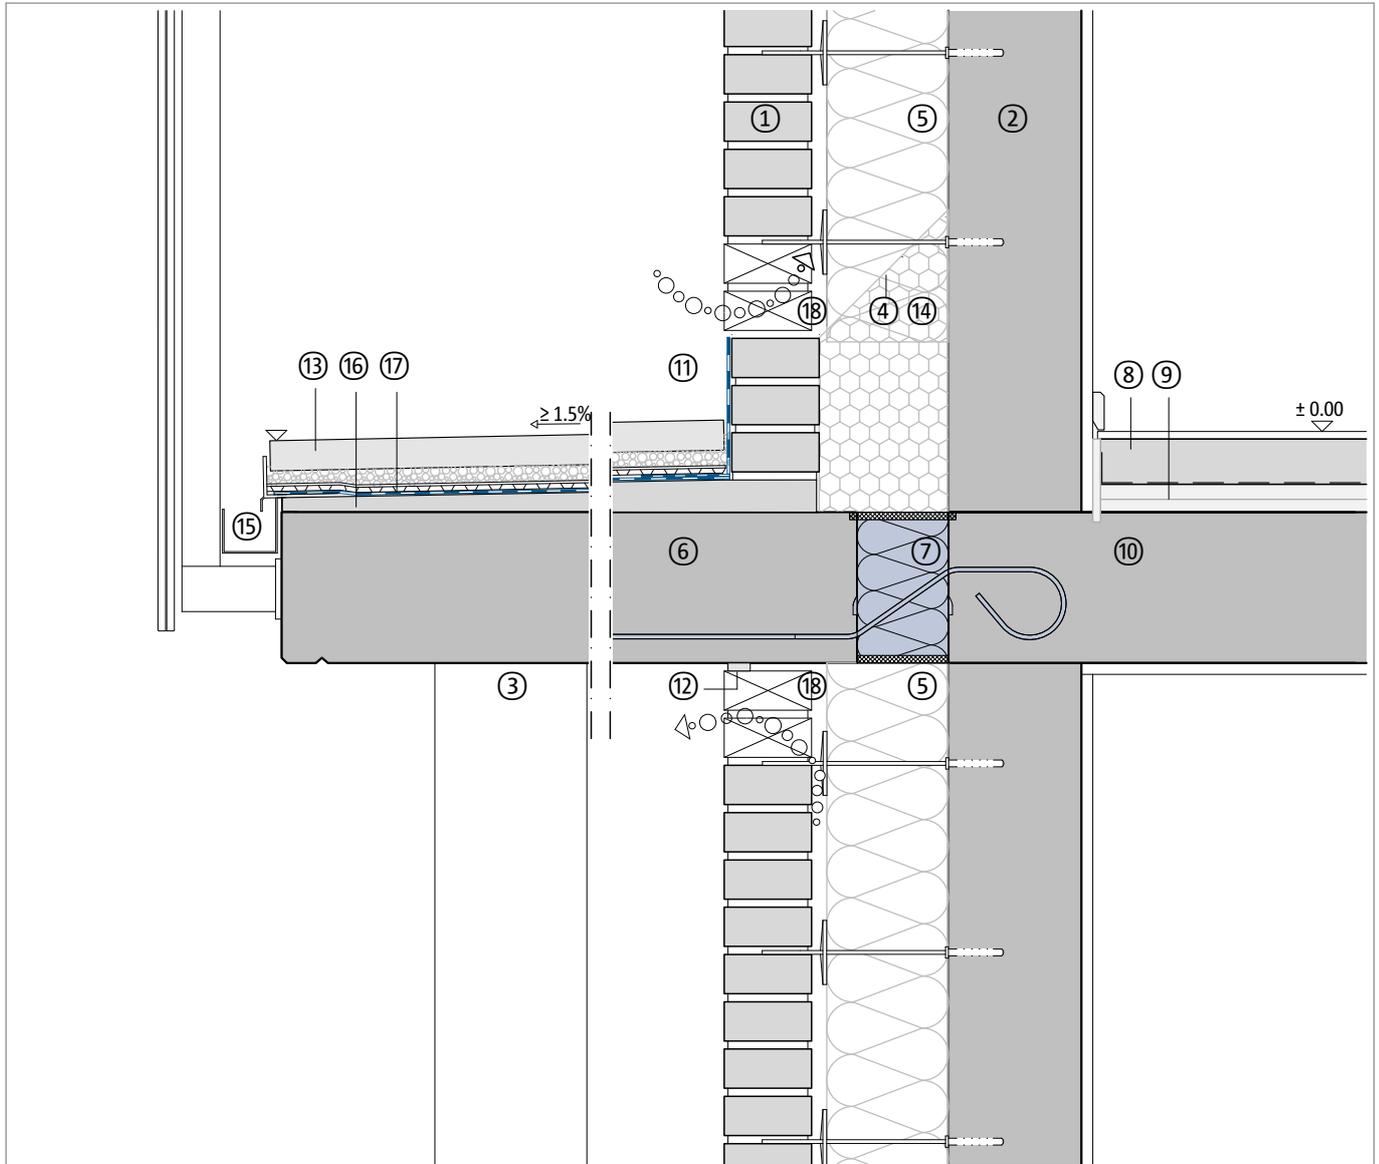

Component, example	
①	Exposed brickwork, clinker
②	Masonry wall or reinforced concrete wall
③	Support, steel or reinforced concrete
④	Masonry barrier
⑤	Thermal insulation, mineral wool
⑥	Reinforced concrete slab
⑦	Schöck Isokorb® XT type Q
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Insulation
⑫	Elastic joint
⑬	Slab in gravel bed
⑭	Perimeter insulation, XPS
⑮	Edge finish: Channel, gravel trap, inlet plate
⑯	Sloping wedge (e.g., bonded screed)
⑰	Drain mat with fleece
⑱	Rear ventilation

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.