


## Thermally separated ceiling connector

Prefabricated reinforced concrete balcony, downward height offset

Double-wall masonry

Detailed view above door | under window with blinds

DCIK 19-04-TFJ | M 1 : 10

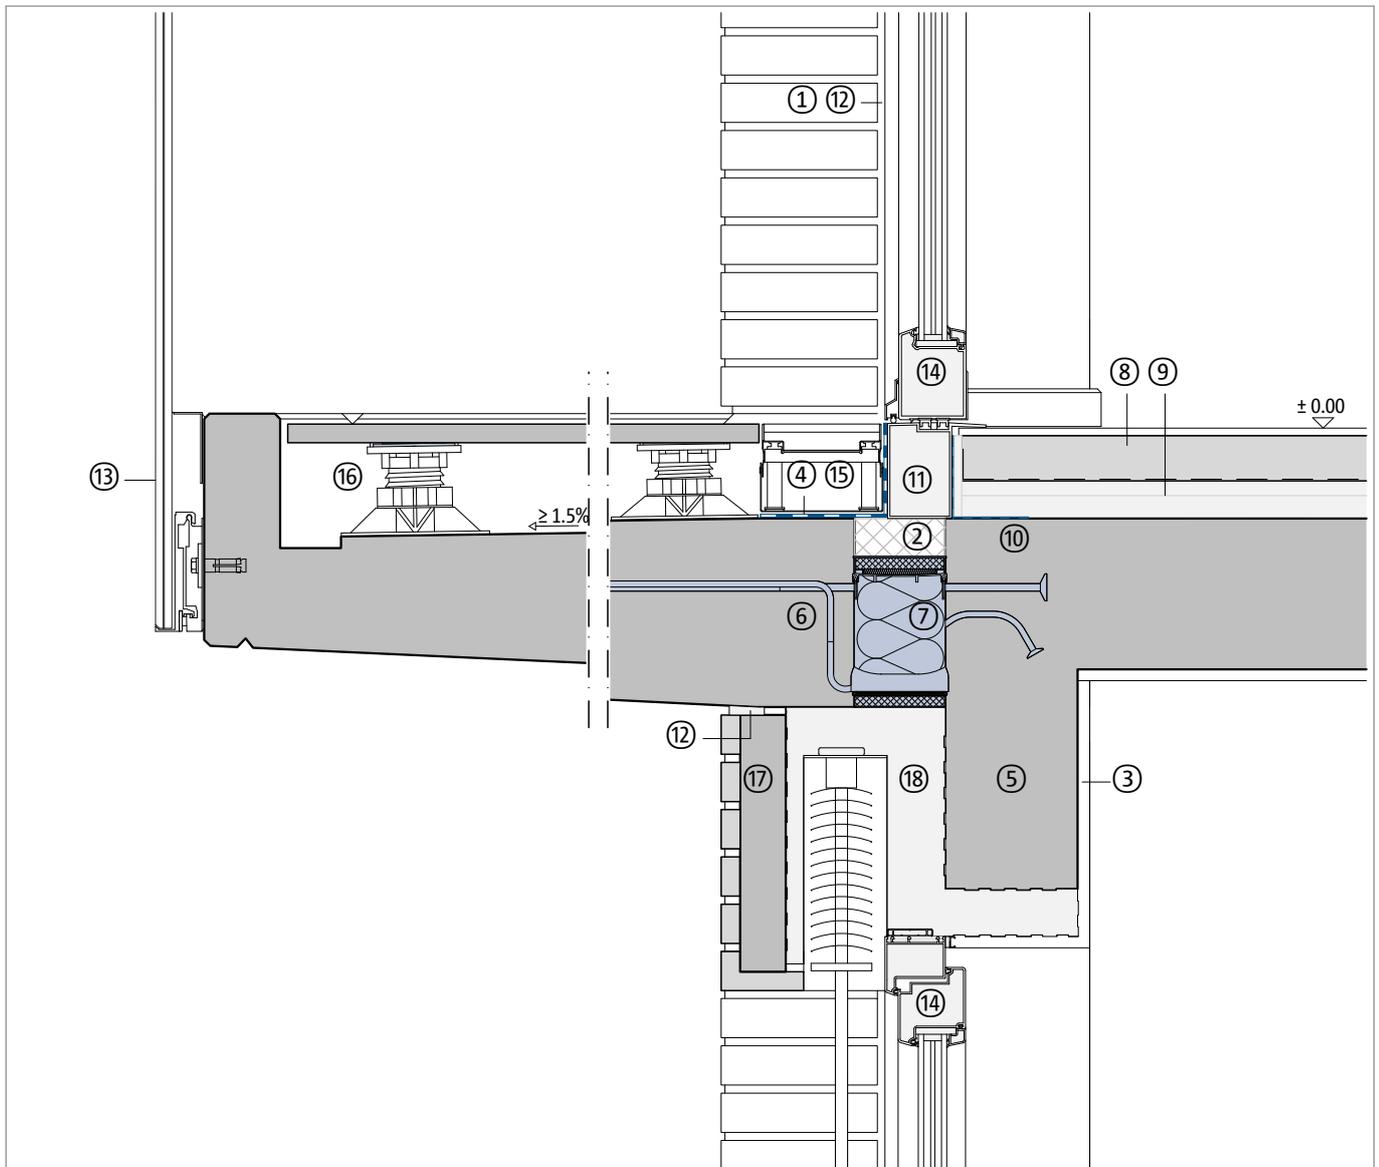

Component, example	
①	Exposed brickwork, clinker
②	Thermal insulation, pressure-resistant (XPS)
③	Interior plaster
④	Insulation
⑤	Reinforced concrete non-pre-stressed girder, based on statics
⑥	Precast reinforced concrete, waterproof concrete
⑦	Schöck Isokorb® XT type K-U
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Threshold, thermally insulated
⑫	Elastic joint
⑬	Railing
⑭	Window element, door element
⑮	Facade channel
⑯	Slab with support system
⑰	Reinforced concrete lintel, concrete clinker
⑱	Blinds, thermally insulated box

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.