


Thermally separated ceiling connector

Precast reinforced concrete canopy, cantilevered

Double-wall masonry

Detailed view above wall | below wall

DCIK 22-01-WW | M 1 : 10

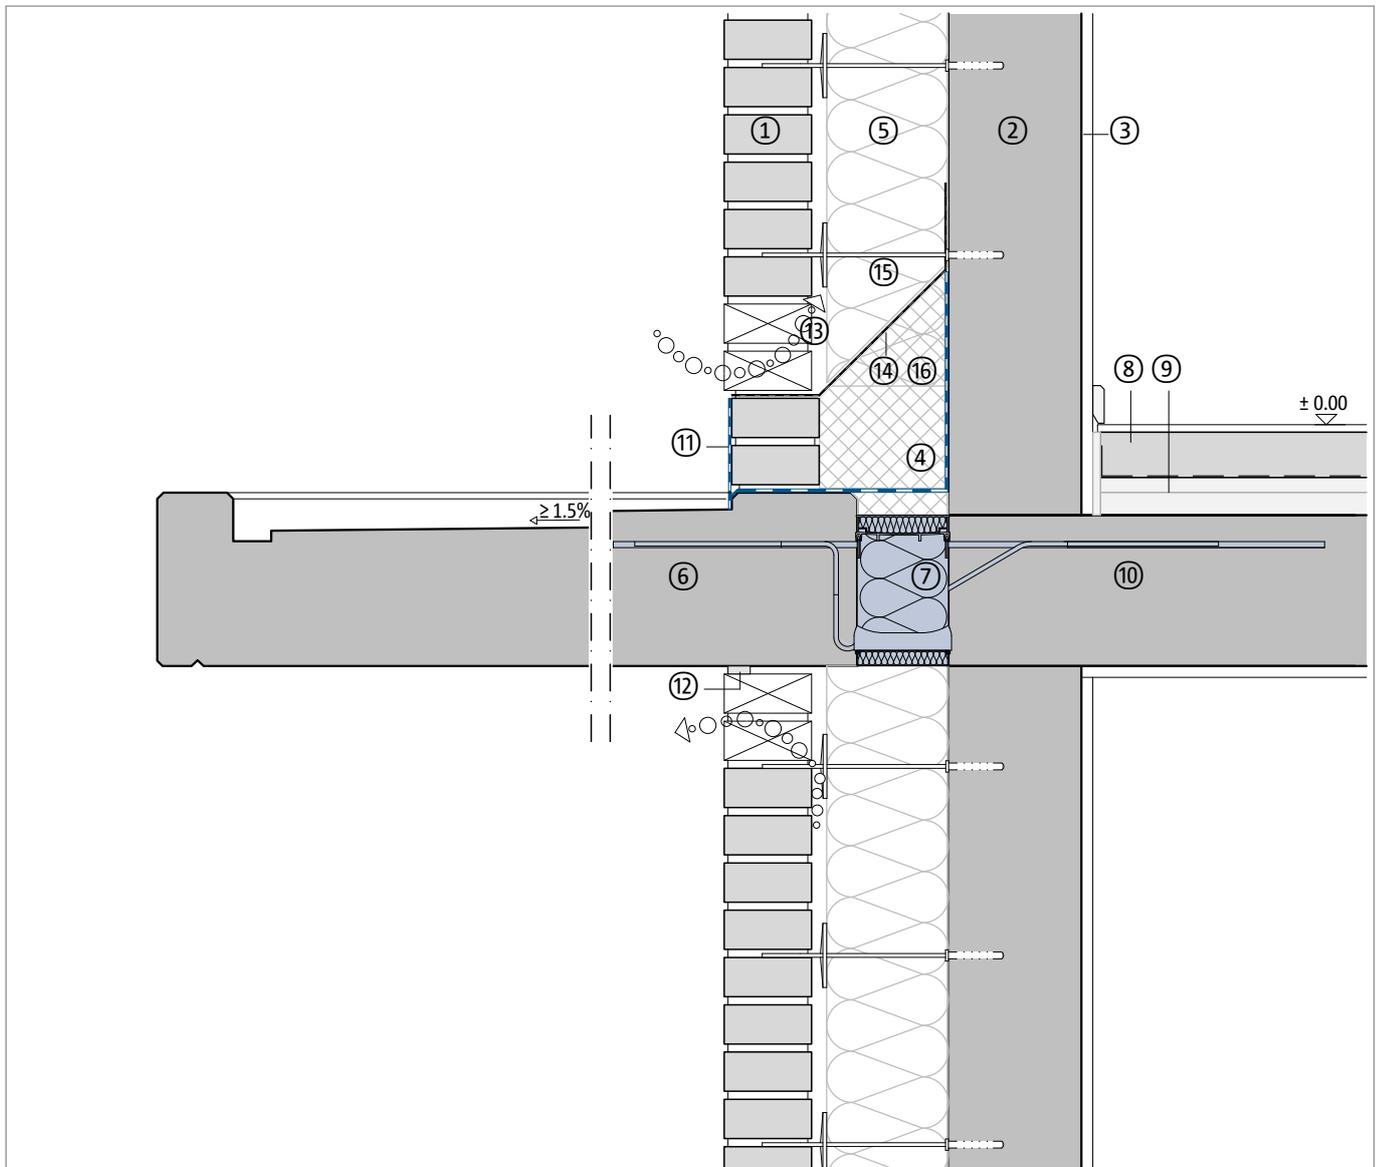

Component, example	
①	Exposed brickwork, clinker
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Insulation
⑤	Thermal insulation, mineral wool
⑥	Precast reinforced concrete, waterproof concrete
⑦	Schöck Isokorb® XT type K
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Moisture protection
⑫	Elastic joint
⑬	Rear ventilation
⑭	Masonry barrier
⑮	Air layer anchor
⑯	Perimeter insulation, XPS

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.