


Thermally separated wall connector

Precast reinforced concrete canopy, cantilevered

Double-wall masonry

Detailed view above wall | below door

DCIK 22-02-WF | M 1 : 10

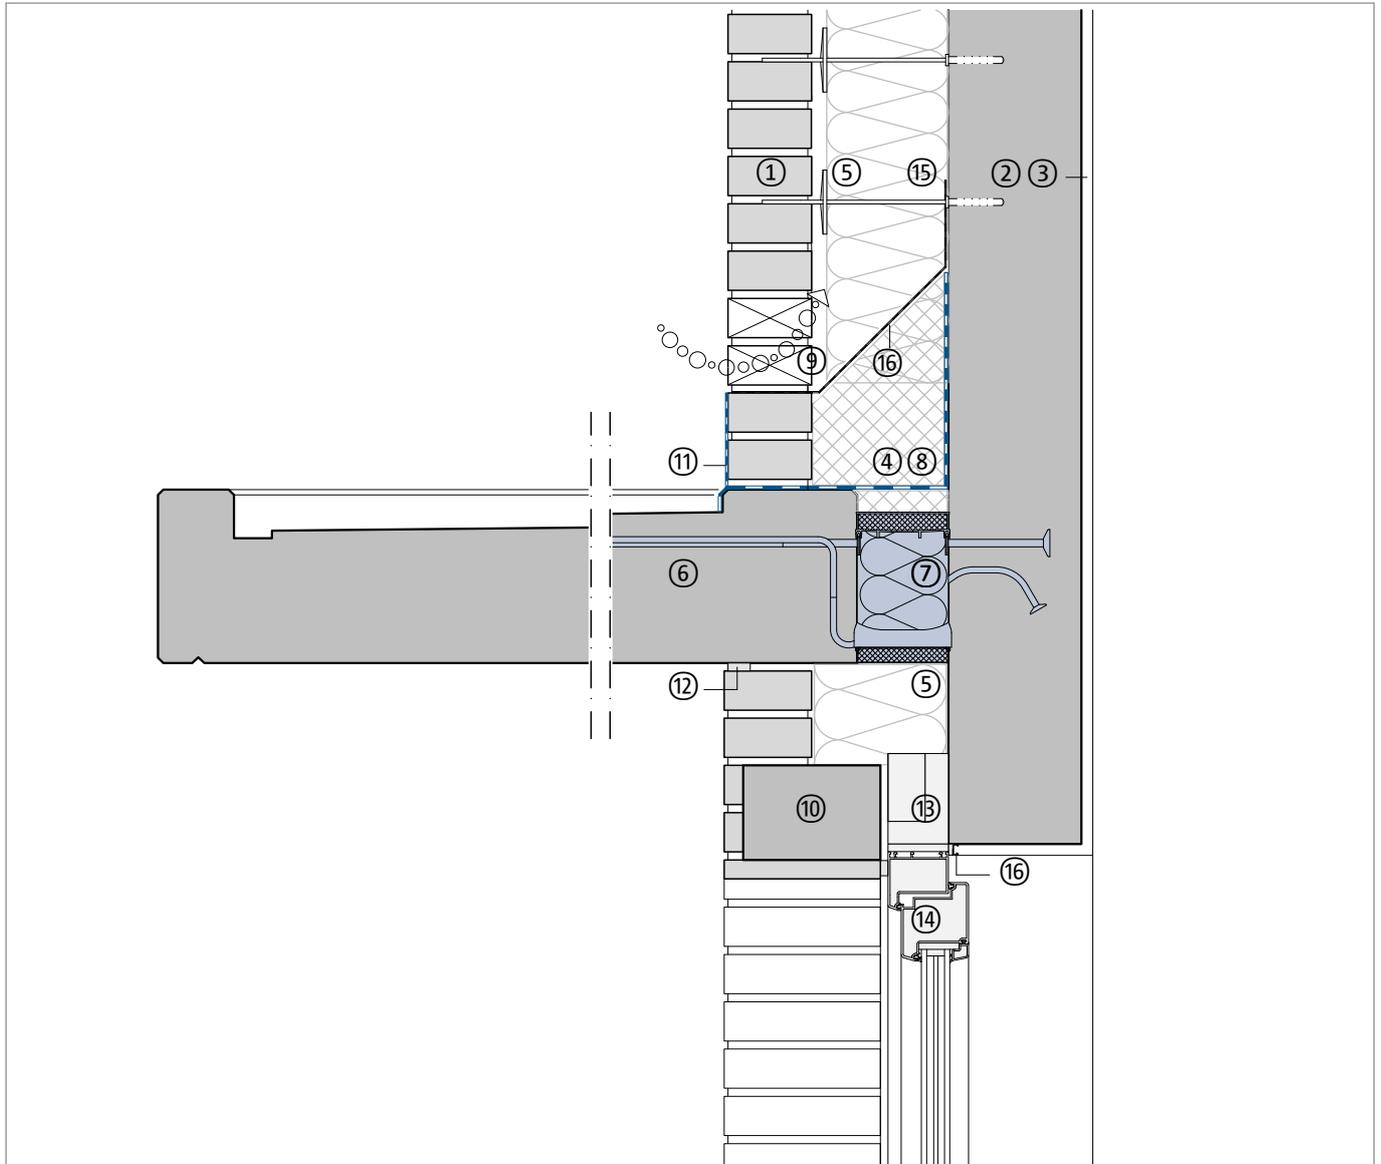

Component, example	
①	Exposed brickwork, clinker
②	Reinforced concrete wall
③	Interior plaster
④	Insulation
⑤	Thermal insulation, mineral wool
⑥	Precast reinforced concrete, waterproof concrete
⑦	Schöck Isokorb® XT type K
⑧	Perimeter insulation, XPS
⑨	Rear ventilation

Component, example	
⑩	Reinforced concrete lintel, concrete clinker
⑪	Moisture protection
⑫	Elastic joint
⑬	Window mounting frame or metal angle
⑭	Window element, door element
⑮	Air layer anchor
⑯	Masonry barrier

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.