


Thermally separated ceiling connector

Steel balcony, supported

Double-wall masonry

Detailed view above door | under window with roller shutter

DCIK 28-03-TFR | M 1 : 10

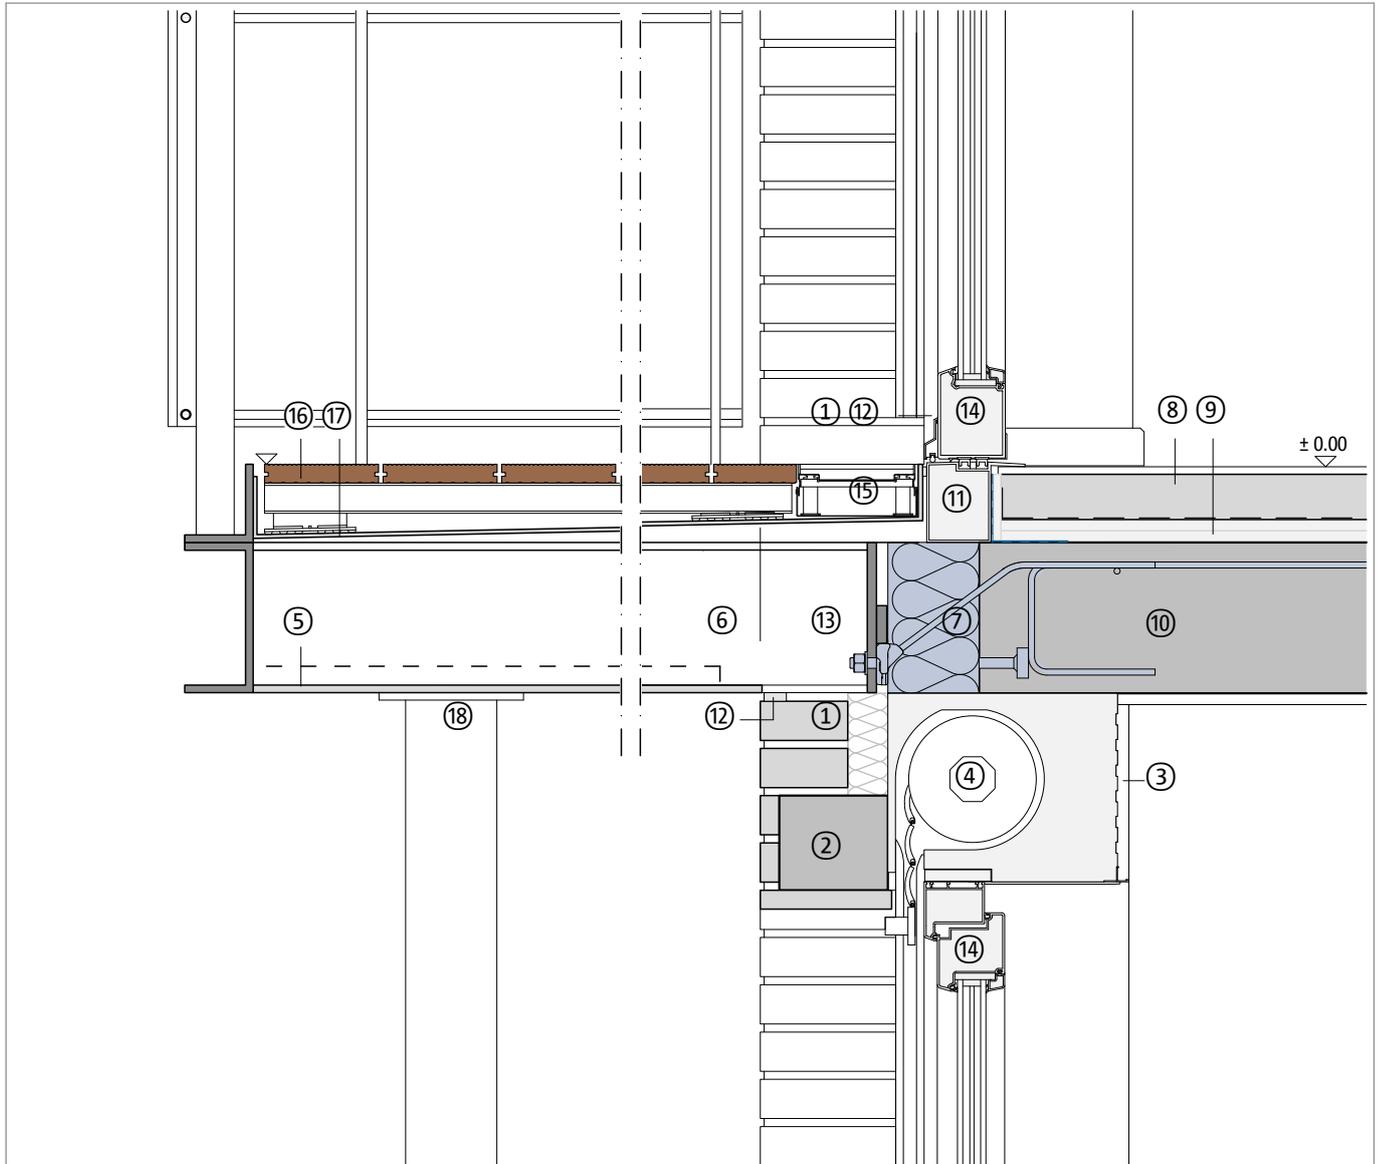

Component, example	
①	Exposed brickwork, clinker
②	Reinforced concrete lintel, concrete clinker
③	Interior plaster
④	Roller shutter, thermally insulated box
⑤	Aluminum composite panel, substructure
⑥	Steel profiles with corrosion protection
⑦	Schöck Isokorb® XT type SQ
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Threshold, thermally insulated
⑫	Elastic joint
⑬	Head plate with cleat, optional adapter
⑭	Window element, door element
⑮	Facade channel
⑯	Wooden floorboards, substructure, support system
⑰	Sloped aluminum tray
⑱	Steel support with corrosion protection

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.