


Thermally separated ceiling connector

Steel balcony, cantilevered

Monolithic masonry

Detailed view above door | under window with roller shutter

DCIK 29-03-TFR | M 1 : 10

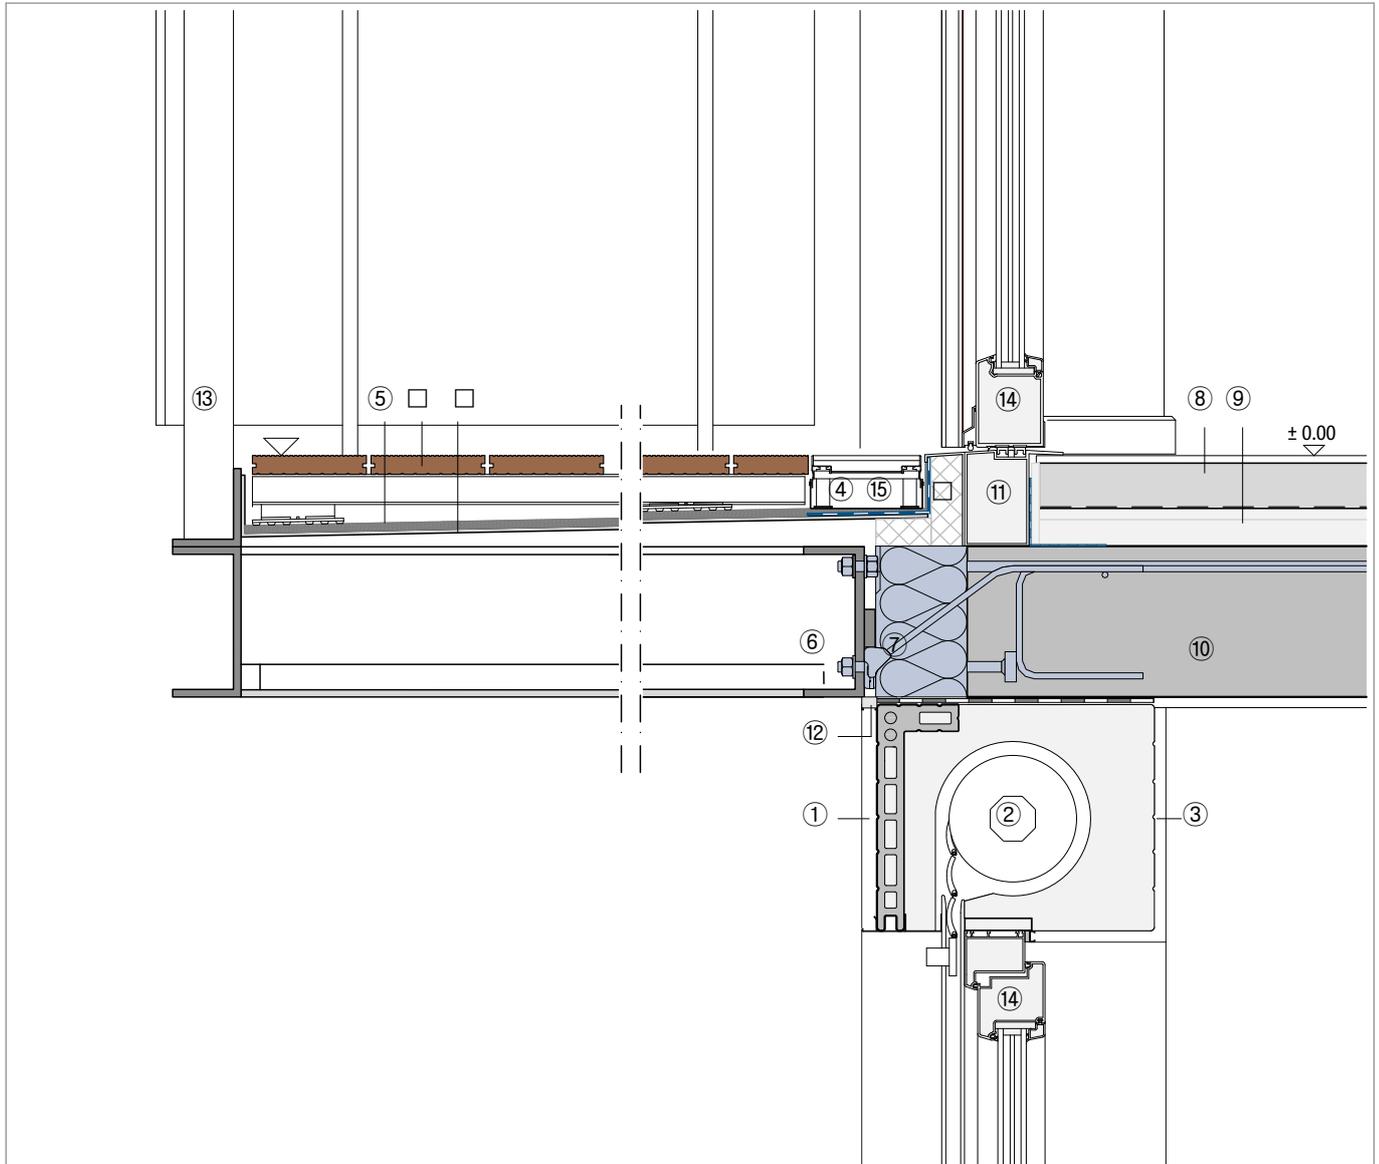

Component, example	
①	Exterior plaster
②	Roller shutter, thermally insulated box
③	Interior plaster
④	Insulation
⑤	Drain mat, optional
⑥	Head plate with cleat
⑦	Schöck Isokorb® XT type SK
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Threshold, thermally insulated
⑫	Plastering profile or elastic joint
⑬	Railing
⑭	Window element, door element
⑮	Facade channel
<input type="checkbox"/>	Wooden floorboards, substructure, support system
<input type="checkbox"/>	Sloped aluminum tray
<input type="checkbox"/>	Thermal insulation, pressure-resistant (XPS)

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.