


Thermally separated ceiling connector

Steel balcony, supported

Wall with rear-ventilated facade (RVF)

Detailed view above wall | below wall

DCIK 32-01-WW | M 1 : 10

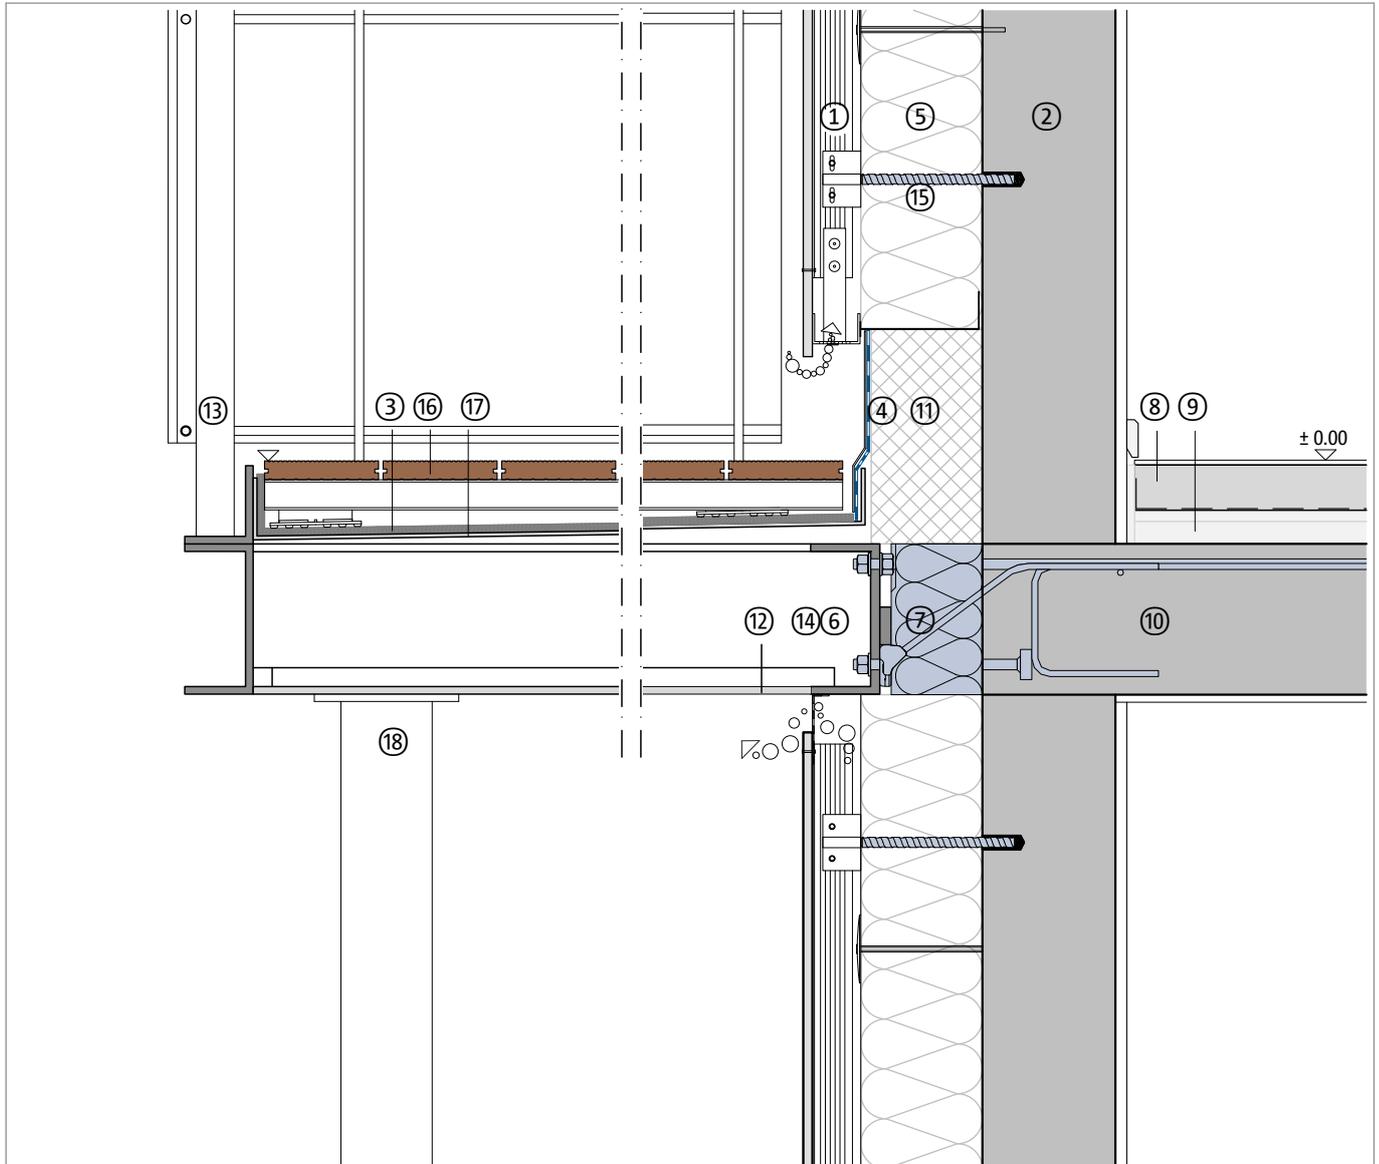

Component, example	
①	Rear-ventilated facade (RVF)
②	Masonry wall or reinforced concrete wall
③	Drain mat, optional
④	Insulation, cover angle optional
⑤	Thermal insulation, mineral wool
⑥	Head plate with cleat
⑦	Schöck Isokorb® XT type SK
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Base insulation, XPS
⑫	Aluminum composite panel, substructure
⑬	Railing
⑭	Steel profiles with corrosion protection
⑮	Schöck Isolink® type F-S1
⑯	Wooden floorboards, substructure, support system
⑰	Sloped aluminum tray
⑱	Steel support with corrosion protection

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.