


Thermally separated ceiling connector

Steel canopy, cantilevered

Exterior wall with thermal insulation composite system

Detailed view above wall | below door

DCIK 33-02-WT | M 1 : 10

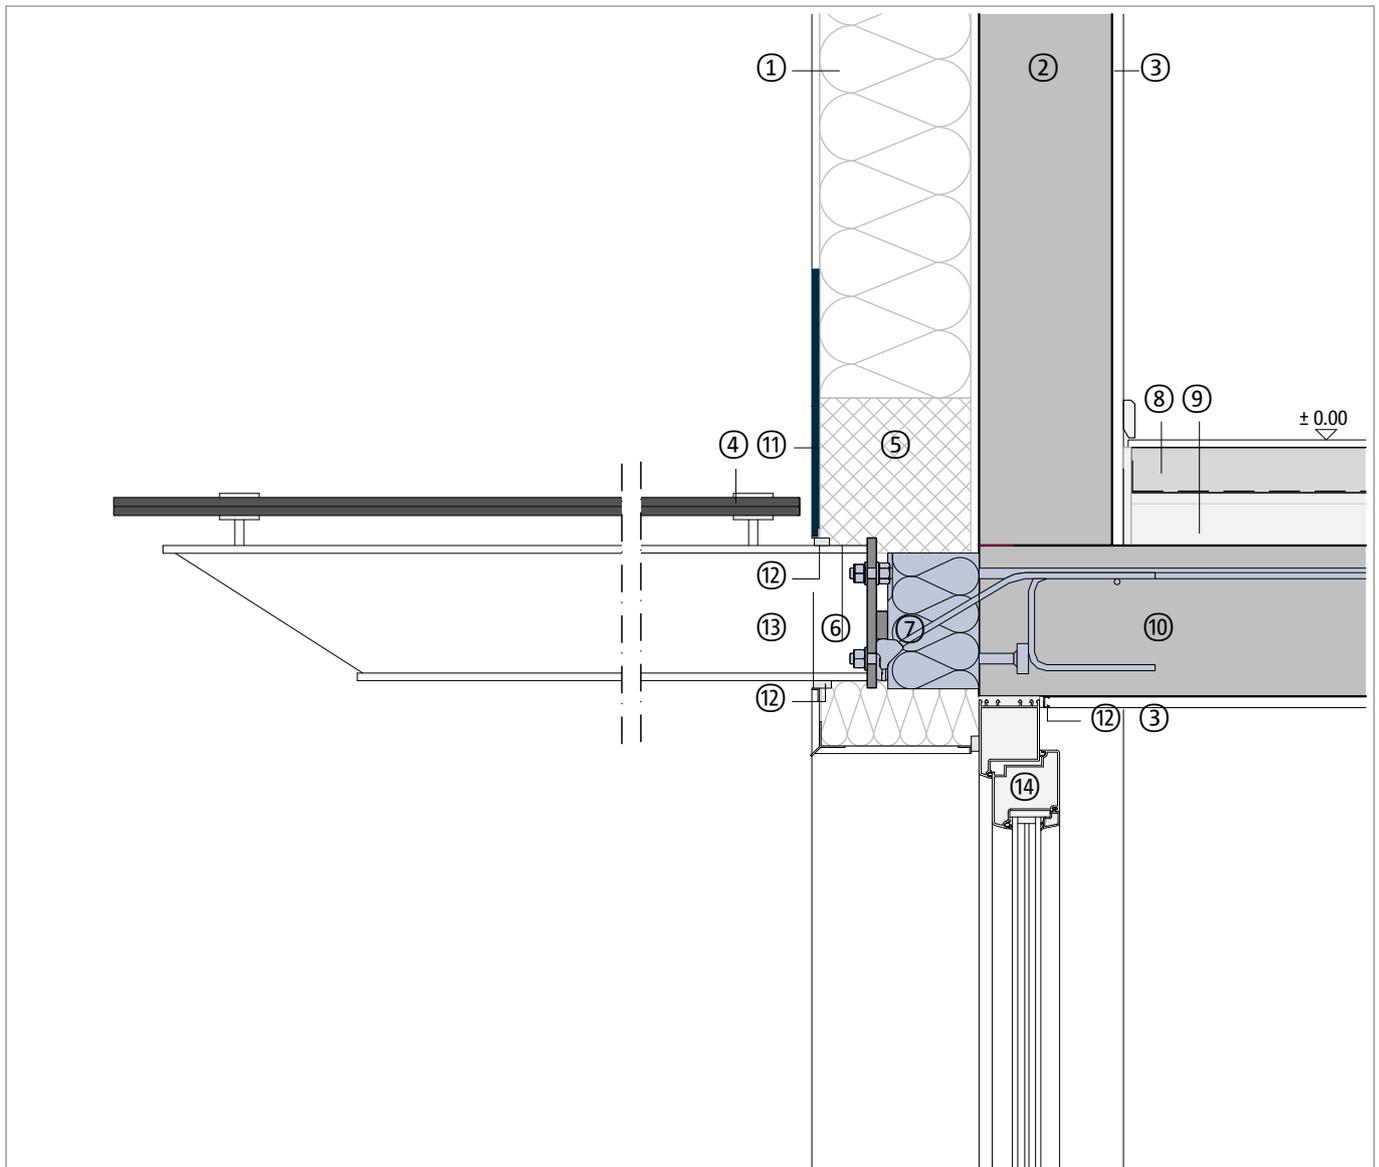

| Component, example | |
|--------------------|--|
| ① | Thermal insulation composite system |
| ② | Masonry wall or reinforced concrete wall |
| ③ | Interior plaster |
| ④ | Laminated safety glass |
| ⑤ | Base insulation, XPS |
| ⑥ | Head plate with cleat, plastering strips |
| ⑦ | Schöck Isokorb® XT type SK |
| ⑧ | Floor covering, floating screed |
| ⑨ | Impact sound and thermal insulation |

| Component, example | |
|--------------------|--|
| ⑩ | Reinforced concrete ceiling |
| ⑪ | Moisture protection |
| ⑫ | Plastering profile or elastic connector |
| ⑬ | Steel profiles with corrosion protection |
| ⑭ | Door element |
| | |
| | |
| | |

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.