


Thermally separated ceiling connector

Steel canopy, cantilevered

Double-wall masonry

Detailed view above wall | below door

DCIK 34-02-WT | M 1 : 10

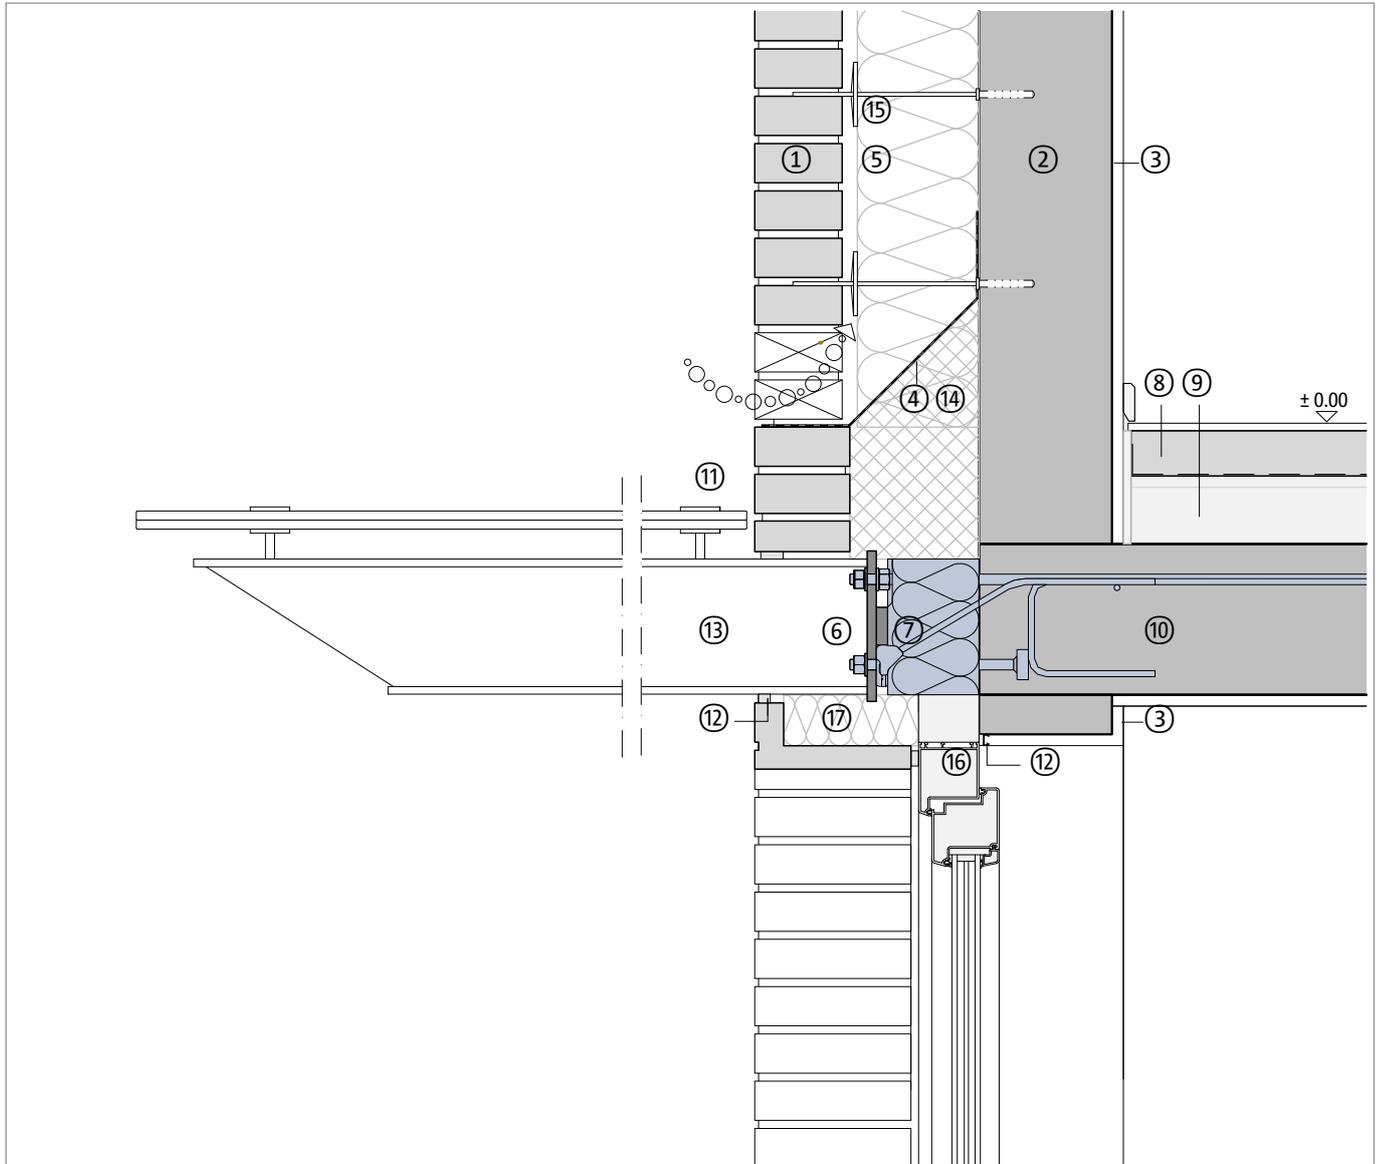

Component, example	
①	Exposed brickwork, clinker
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Masonry barrier
⑤	Thermal insulation, mineral wool
⑥	Head plate with cleat
⑦	Schöck Isokorb® XT type SK
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Laminated safety glass
⑫	Elastic joint
⑬	Steel profiles with corrosion protection
⑭	Perimeter insulation, XPS
⑮	Rear ventilation, cavity wall tie
⑯	Door element
⑰	Reinforced concrete lintel, concrete clinker

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.