


Thermally separated ceiling connector

Steel canopy, cantilevered

Monolithic masonry

Detailed view above wall | below door

DCIK 35-02-WT | M 1 : 10

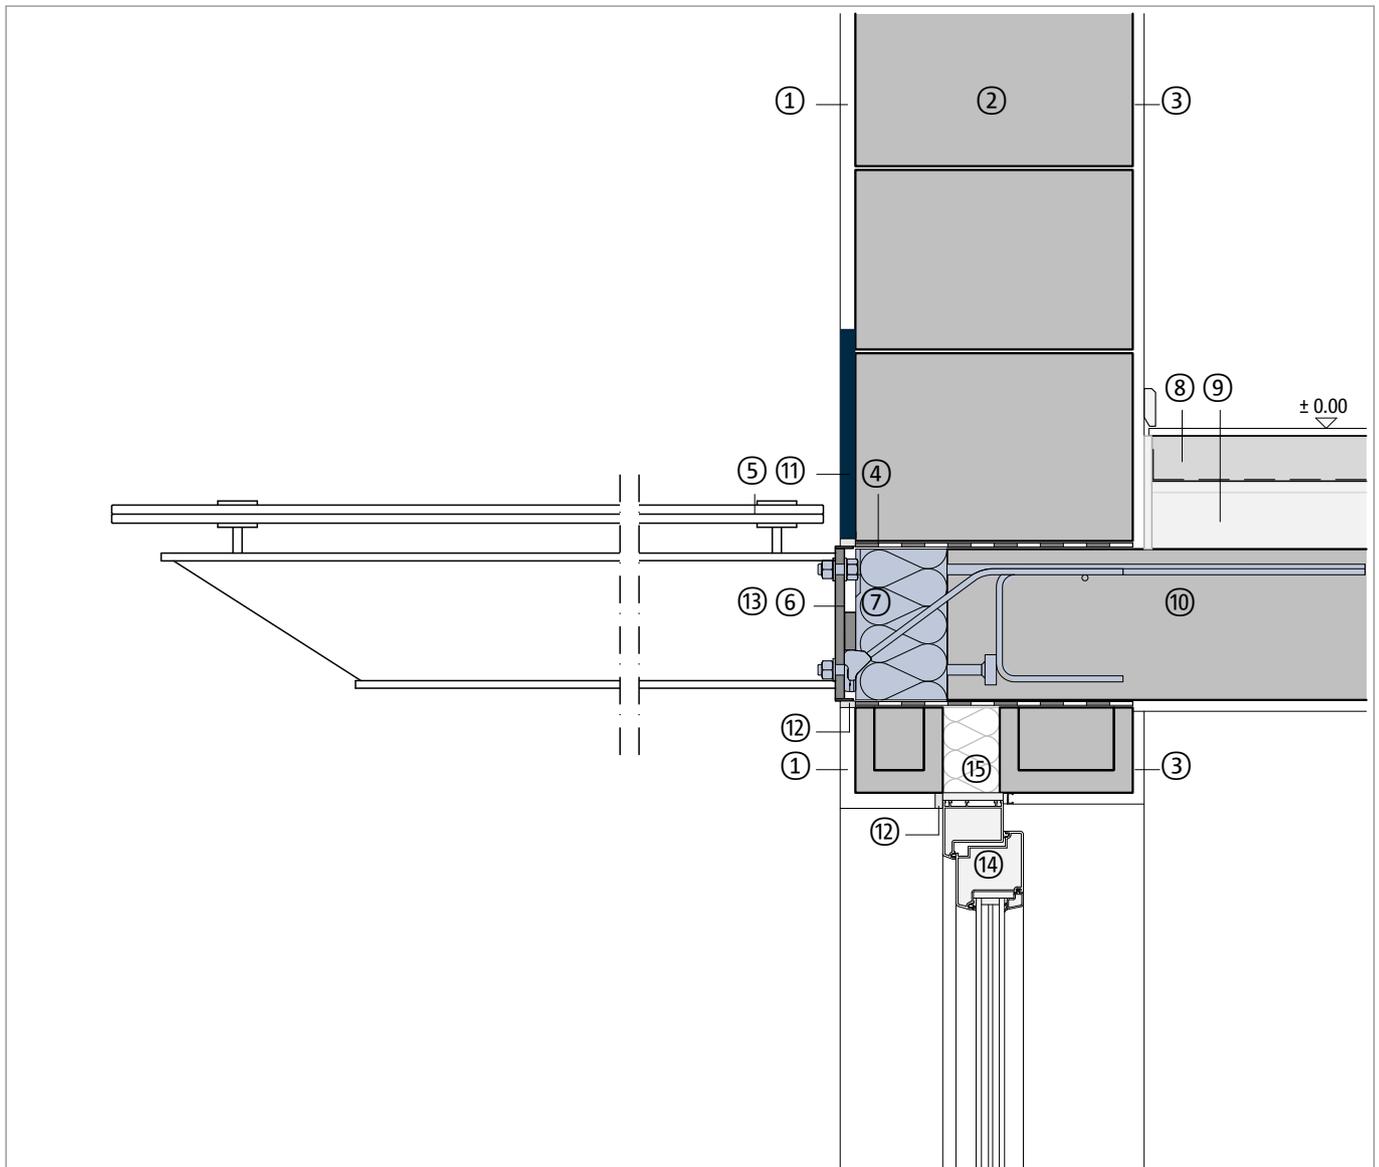

Component, example	
①	Exterior plaster
②	Masonry wall (e.g., insulating bricks)
③	Interior plaster
④	Bitumen sheet R500, sanded
⑤	Laminated safety glass
⑥	Head plate with cleat
⑦	Schöck Isokorb® XT type SK
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Moisture protection
⑫	Plastering profile or elastic joint
⑬	Steel profiles with corrosion protection
⑭	Door element
⑮	Brick lintel, thermally separated

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.