


Thermally separated ceiling connector

Prefabricated reinforced concrete fascia

Wall with rear-ventilated facade (RVF)

Detailed view of fascia | Roof edge structure

DCIK 42-01-AD | M 1 : 10

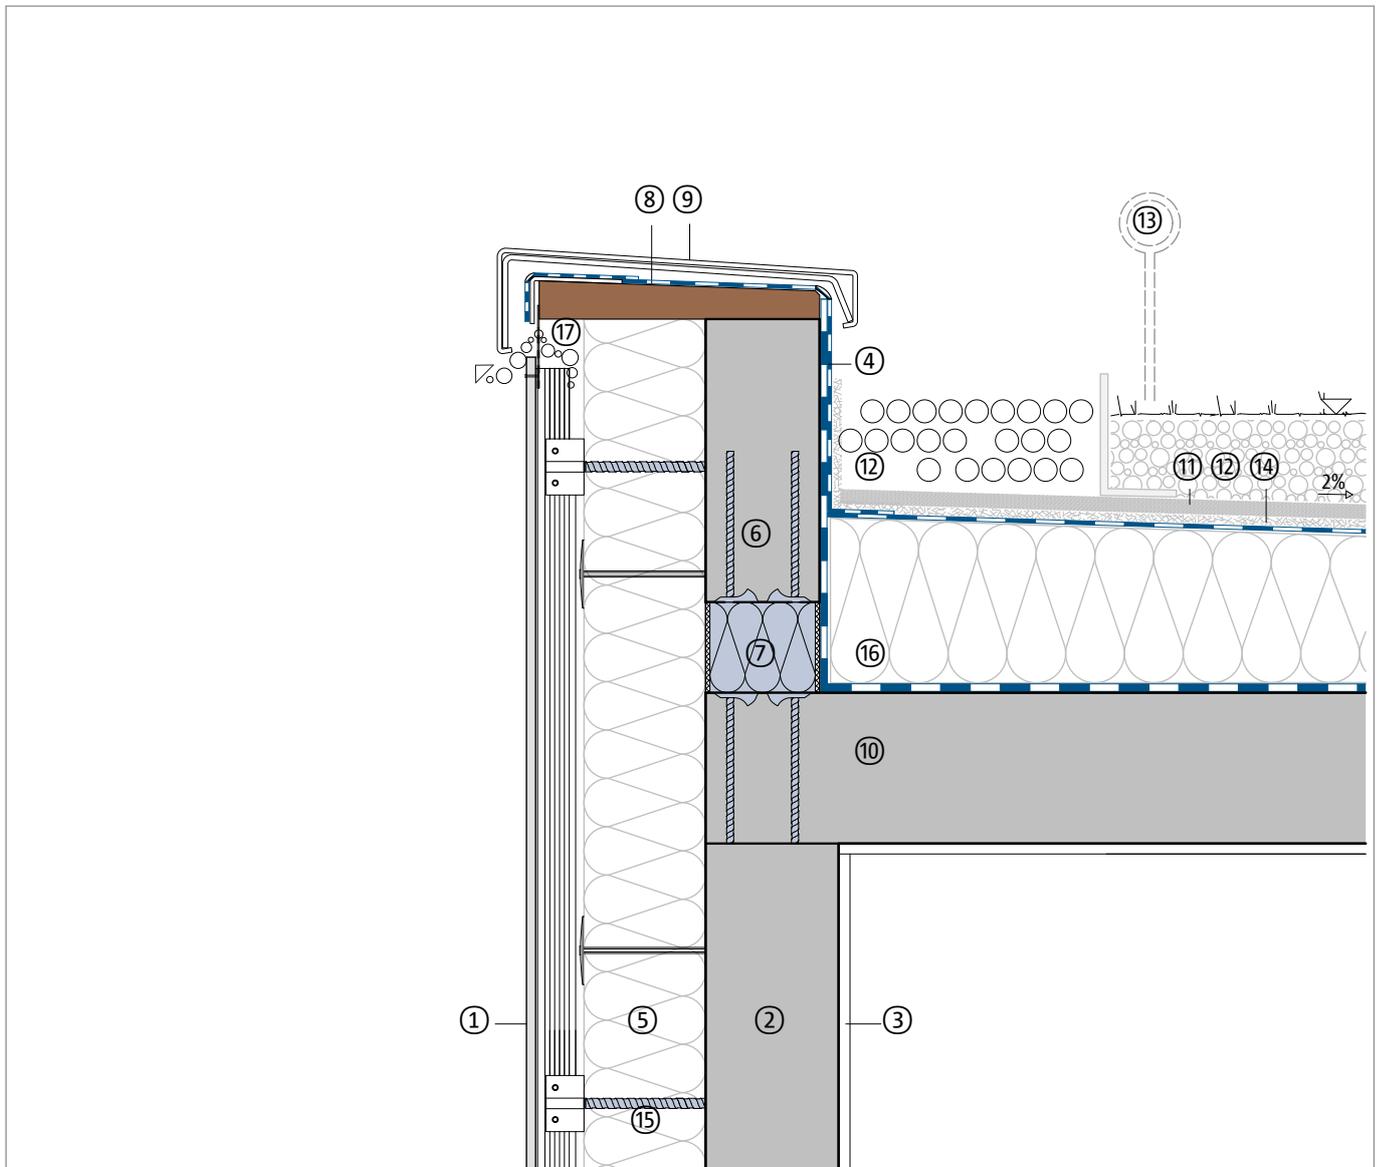

Component, example	
①	Rear-ventilated facade (RVF)
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Insulation
⑤	Thermal insulation, mineral wool
⑥	Fascia, precast reinforced concrete
⑦	Schöck Isokorb® CXT type A
⑧	Plank, multi-layer wood
⑨	Fascia cover, brackets, butt connectors

Component, example	
⑩	Reinforced concrete ceiling
⑪	Drain element
⑫	Gravel strip, green roof
⑬	Anchor point, optional
⑭	Protective fleece
⑮	Schöck Isolink® type F-S1
⑯	Sloping insulation
⑰	Rear ventilation

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.