


Thermally separated ceiling connector

Prefabricated reinforced concrete fascia

Wall with rear-ventilated facade (RVF)

Detailed view of parapet, preconfigured | Roof edge structure

DCIK 42-02-BVD | M 1 : 10

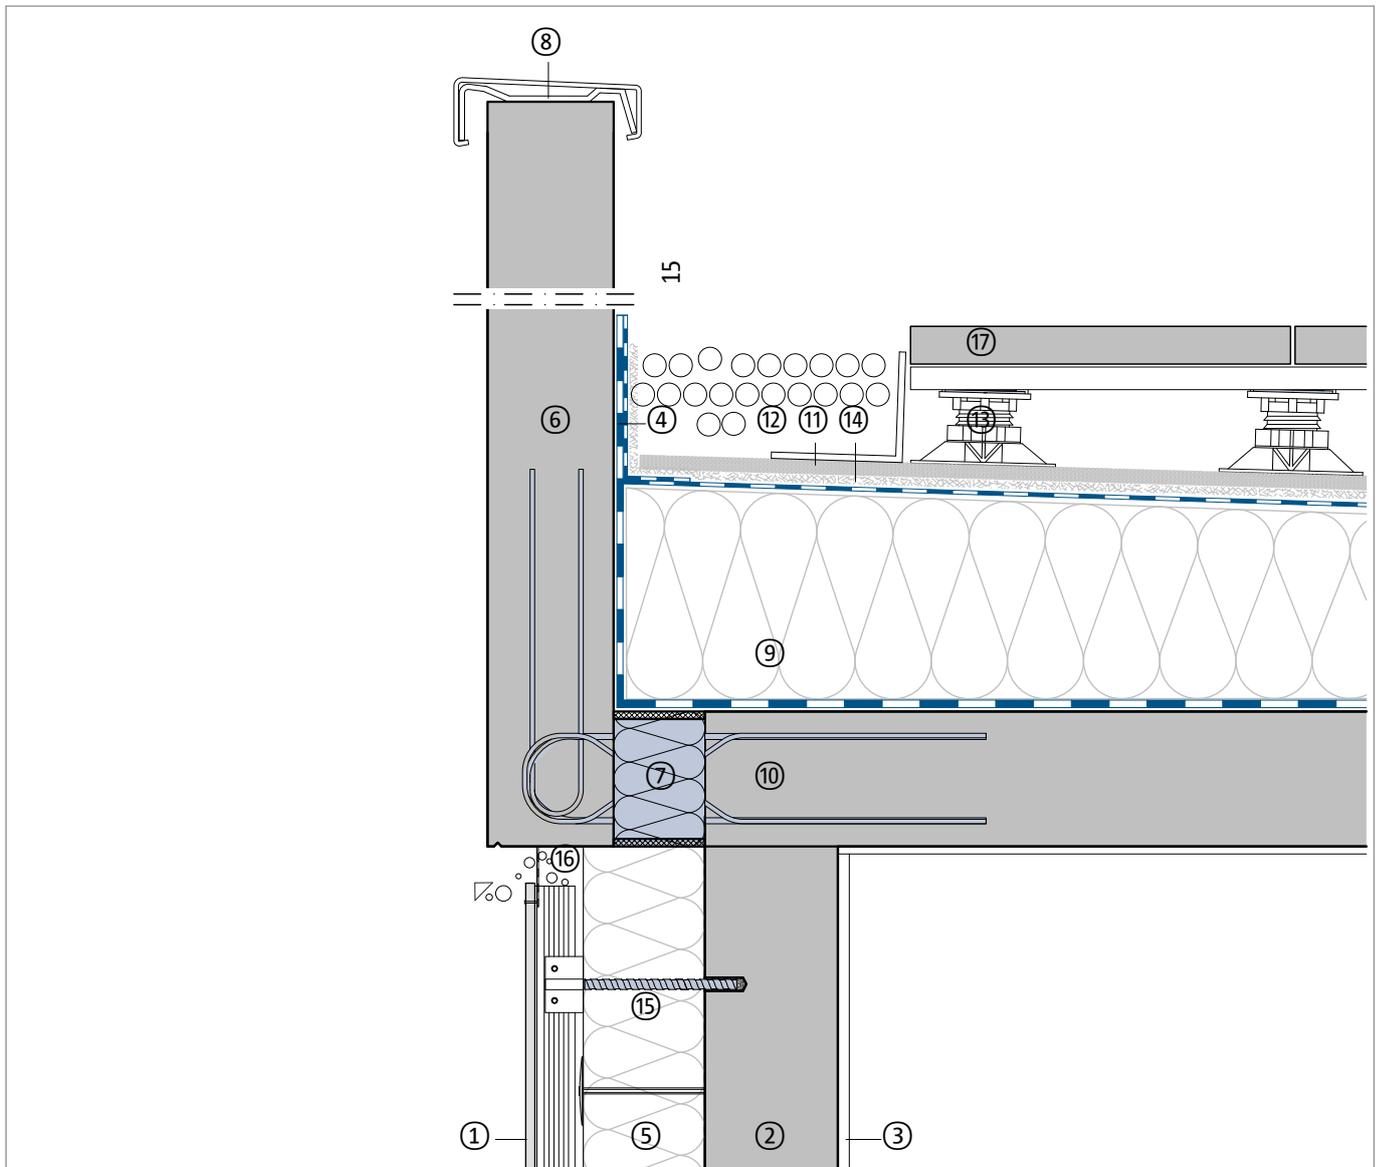

Component, example	
①	Rear-ventilated facade (RVF)
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Insulation
⑤	Thermal insulation, mineral wool
⑥	Fascia, precast reinforced concrete
⑦	Schöck Isokorb® XT type F
⑧	Fascia cover, brackets, butt connectors
⑨	Sloping insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Drain element
⑫	Gravel strip
⑬	Support system
⑭	Protective fleece
⑮	Schöck Isolink® type F-S1
⑯	Rear ventilation
⑰	Covering, substructure

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.