


Thermally separated ceiling connector

Precast reinforced concrete balcony, cantilevered

Wall with rear-ventilated facade (RVF)

Detailed view above door | under window with blinds

DCIK 04-04-TFJ | M 1 : 10

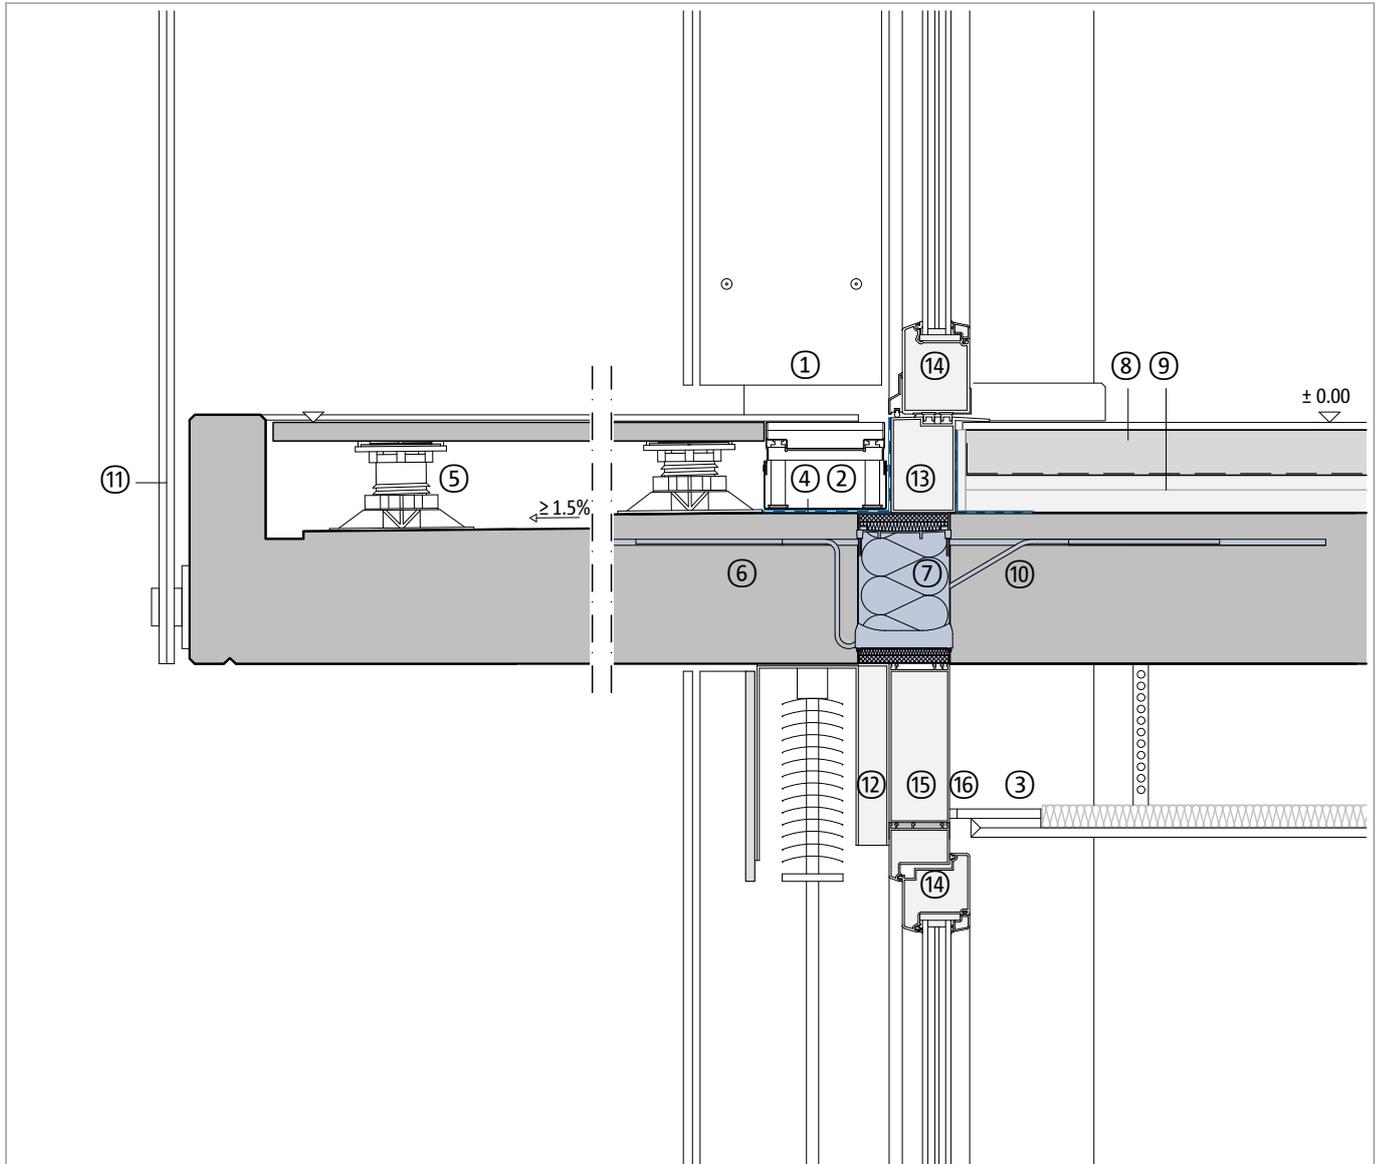

Component, example	
①	Rear-ventilated facade (RVF)
②	Facade channel
③	Suspended ceiling
④	Insulation
⑤	Slab with support system
⑥	Precast reinforced concrete, waterproof concrete
⑦	Schöck Isokorb® XT type K
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Railing
⑫	Blinds, thermally insulated box
⑬	Threshold, thermally insulated
⑭	Window element, door element
⑮	Profile, thermally insulated
⑯	Elastic joint

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.